


# PP black backing ring ANSI

UV-RESISTANT

Backing ring ANSI  
ASME B16.5 class 150  
steel insert  
flange connection  
injection moulded  
PP-FRP black

**Advantages:**

- UV-resistant
- High life expectancy
- Corrosion-resistant

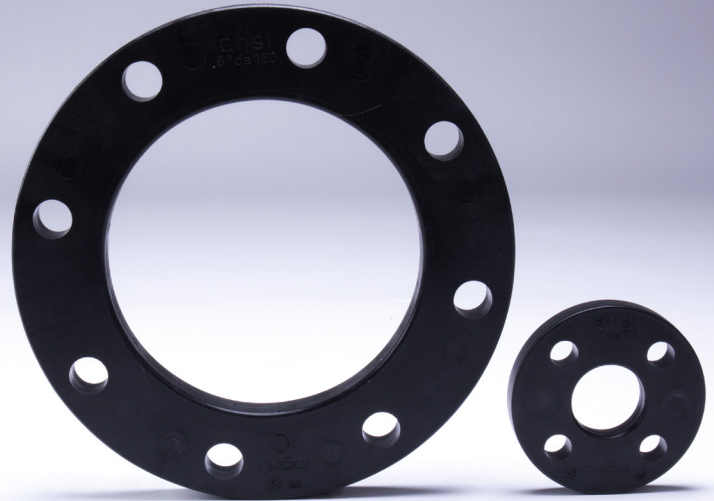

**SUPPLY RANGE backing ring ANSI PP-GFK black**

dimension	code	detail
20	14.013.0020.11	20-1/2" - MOP 16 bar
25	14.013.0025.11	25-3/4" - MOP 16 bar
32	14.013.0032.11	32-1" - MOP 16 bar
40	14.013.0040.11	40-1 1/4" - MOP 16 bar
50	14.013.0050.11	50-1 1/2" - MOP 16 bar
63	14.013.0063.11	63-2" - MOP 16 bar
75	14.013.0075.11	75-2 1/2" - MOP 16 bar
90	14.013.0090.11	90-3" - MOP 16 bar
110/125	14.013.0110.11	110/125-4" - MOP 16 bar
160	14.013.0160.11	160-6" - MOP 16 bar
200/225	14.013.0200.11	200/225-8" - MOP 16 bar
250/280	14.013.0250.11	250/280-10" - MOP 16 bar
315	14.013.0315.11	315-12" - MOP 16 bar

